

Multi-Pull

THE SYSTEM FOR SHOOTING

GROUND AUTOMATION



EP096AC-Timer

Characteristics:

The **EP096AC-Timer** is able to perform a countdown from the configured time (01-99 seconds) till 00. On the rear panel (**Fig1**) there is a selector (**S3**) to switch between two different preconfigured times.

The Timer can be powered from 100v till 230v AC.



Operative functions:

The stopwatch will start to countdown as soon as you push the start button on the remote. When it will reach "05" seconds it will start to blink red to inform about the ending of the seconds. When it reaches "00" it will blink red for 10 times.



(Fig1)

- S1 = Main Power Switch
- S2 = Configuration mode
- S3 = Configured time selection
- J1 = Power input
- J2 = Wired remote

The Remote (Fig2)

Start/Pause button has two functions:


- Push one time and it will start the counting.
- A second push will pause the count putting the timer in "**pause condition**"
- Pressing it again will continue the count.

NOTE: While on "00" blinking position, pressing the Start/Pause button will reset the timer to initial position.

The Reset button one has only one function:

Pressing this button while counting will no work, only when the timer is in **Pause condition**, pressing the Reset button will reset the timer.

The two buttons serves also to change the configurations in the setup page. By moving the "**PROG**" selector (**S2**) you can enter the configuration menu. While on the menu, pressing "start/pause" button will move the cursor, And the "Reset" button will change the option.

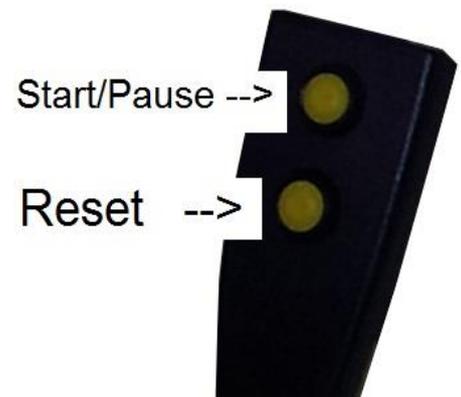

(Fig2)

Setup page

The setup page has 5 options:

- Background color (BGcol)
- Text Color (FGcol)
- Time 1
- Time 2
- Luminosity

Note:

Besides the two time options, we suggest to not change the factory setup. The text and background color is the best with "white-on-black" and the luminosity is automatically changing by the sunlight sensor.